

SCHROEVEN


Verzonken spaanplaatschroef met kruisgleuf Pozi RVS A2



Normen

Afmeting
Mechanisch
Chemisch

Kyocera Senco specificatie
DIN 267-11
DIN 267-11

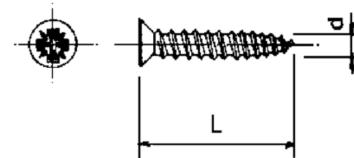

Afmeting (d)	Afmeting (L)	Bit nr.	Verpakt per	Artikelnummer
3,0	20	1	200	SRP3020V2
3,0	25	1	200	SRP3025V2
3,0	30	1	200	SRP3030V2
3,0	40	1	200	SRP3040V2
3,5	20	2	200	SRP3520V2
3,5	25	2	200	SRP3525V2
3,5	30	2	200	SRP3530V2
3,5	35	2	200	SRP3535V2
3,5	40	2	200	SRP3540V2
4,0	20	2	200	SRP4020V2
4,0	25	2	200	SRP4025V2
4,0	30	2	200	SRP4030V2
4,0	35	2	200	SRP4035V2
4,0	40	2	200	SRP4040V2
4,0	45	2	200	SRP4045V2
4,0	50	2	200	SRP4050V2
4,5	40	2	200	SRP4540V2
4,5	45	2	200	SRP4545V2
4,5	50	2	200	SRP4550V2
4,5	60	2	200	SRP4560V2
5,0	40	2	200	SRP5040V2
5,0	50	2	200	SRP5050V2
5,0	60	2	200	SRP5060V2
5,0	70	2	200	SRP5070V2
5,0	80	2	200	SRP5080V2
5,0	90	2	200	SRP5090V2
5,0	100	2	200	SRP5100V2
6,0	100	3	200	SRP6100V2
6,0	120	3	200	SRP6120V2